


# DEVELOPMENT PERMIT AREA GUIDELINES

## DPA 1 CITY CENTRE

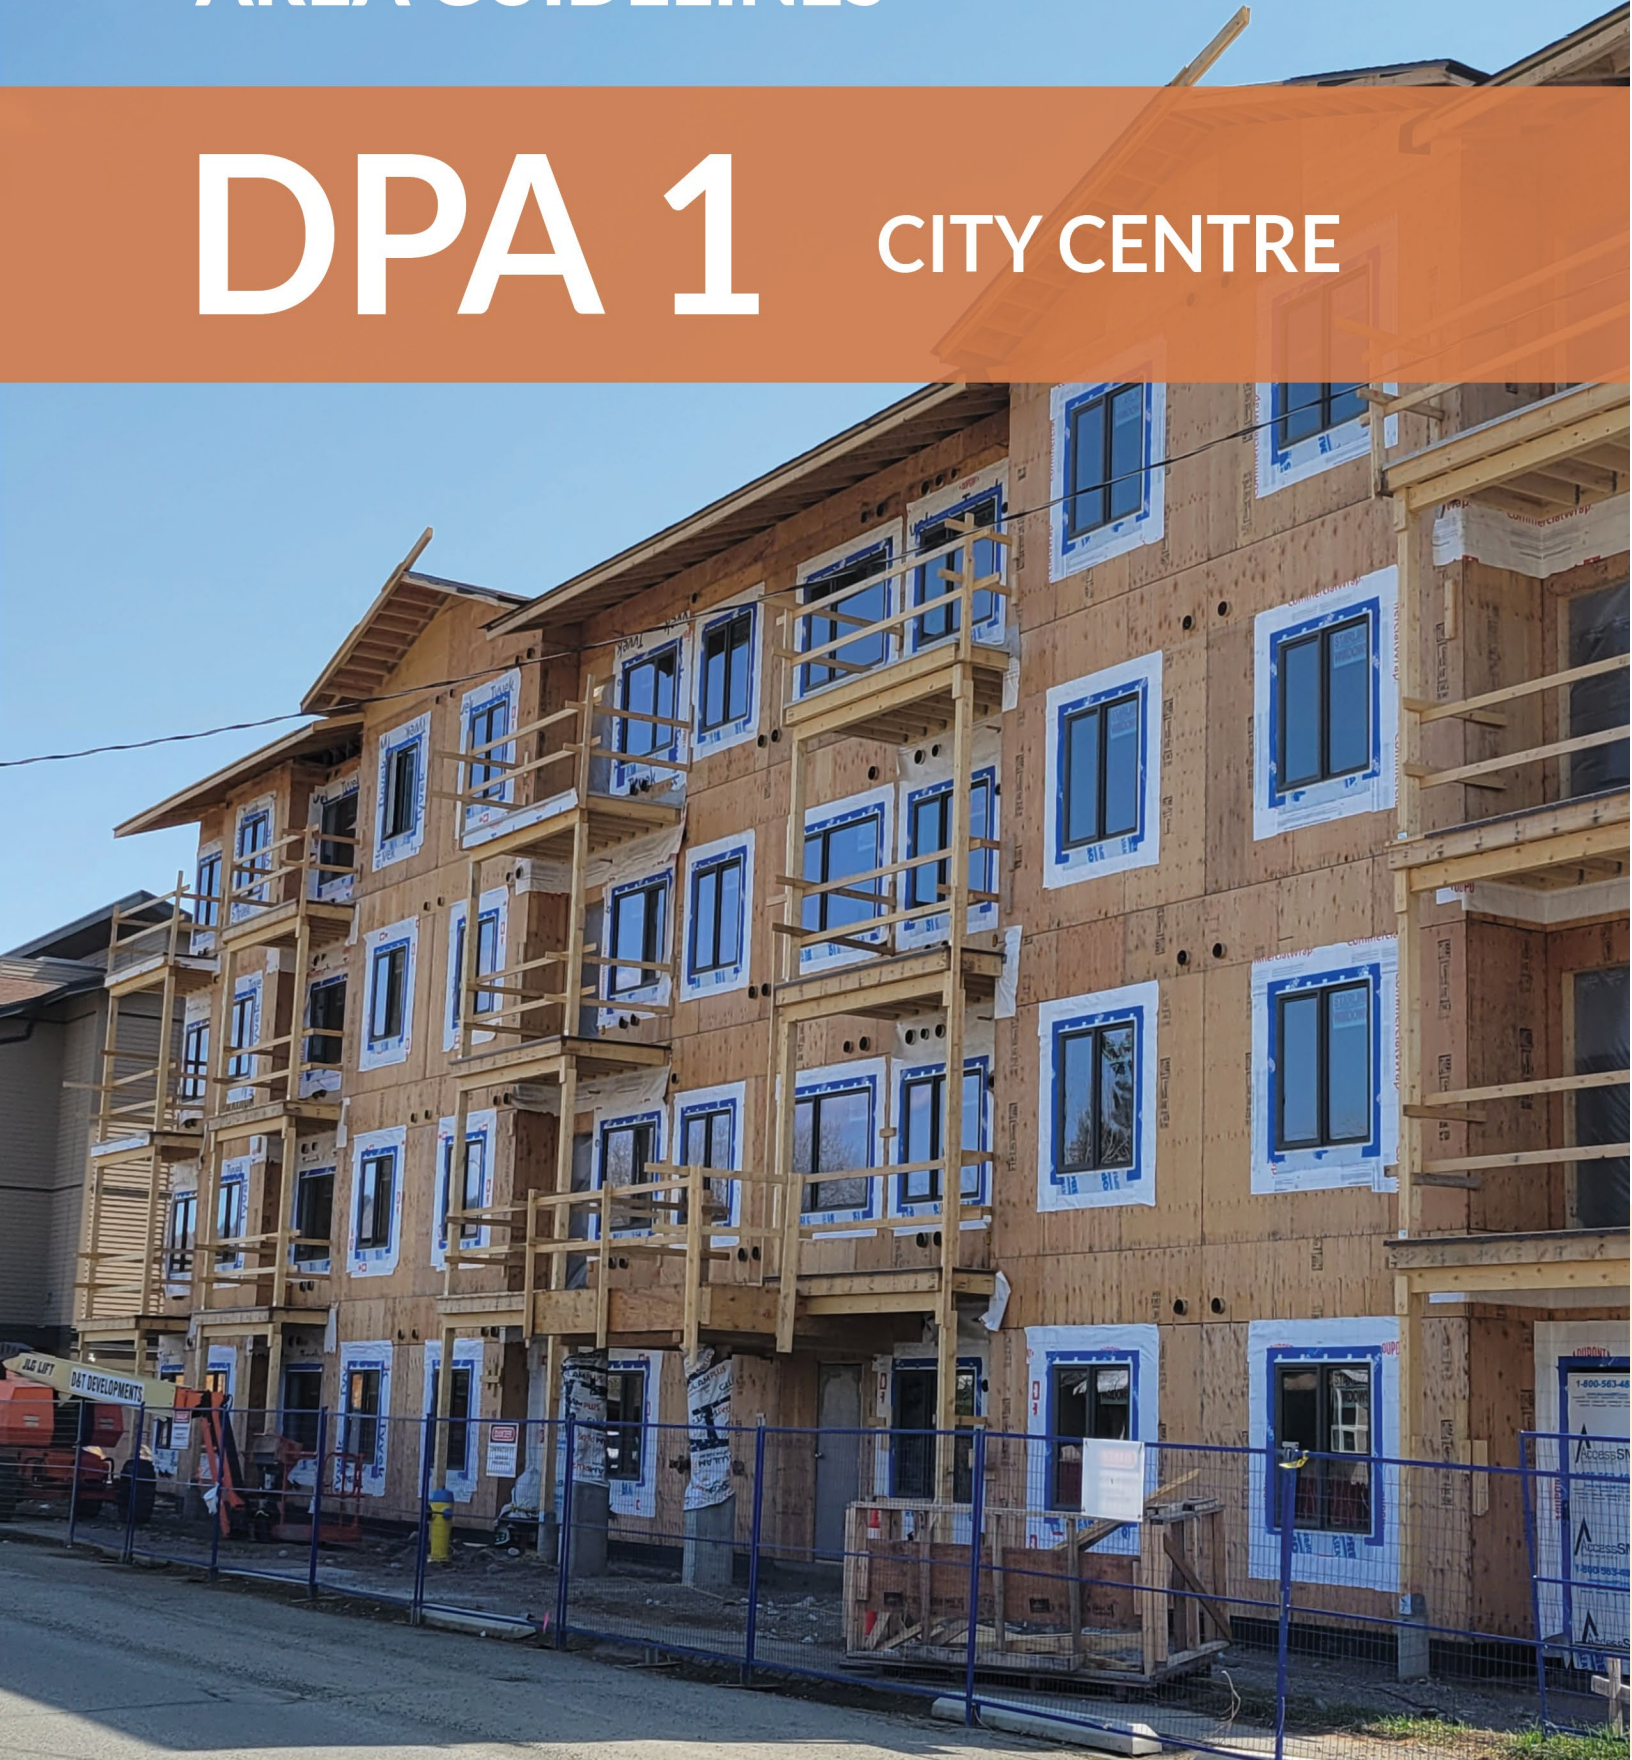

## General Regulations

### 12.1.1 Category

DPA 1 is designated under the following categories of Section 488 (1) of the *Local Government Act*:

- (d) Revitalization of an area in which a commercial use is permitted;
- (e) Establishment of objectives for the form and character of commercial, industrial or multi-family residential development;
- (h) Establishment of objectives to promote energy conservation;
  - (i) Establishment of objectives to promote water conservation;
  - (j) Establishment of objectives to promote the reduction of greenhouse gas emissions.

### 12.1.2 Area of Applicability

- DPA 1 guidelines apply to all parcels located in DPA 1 as shown on Appendix K.
- Institutional developments within the City Centre are requested to apply under this Development Permit Area.
- In situations where guidelines from DPA 1 conflict with guidelines from DPAs 4, 5 or 6, the guidelines from DPA 1 take precedence.

### 12.1.3 Justification

As the city grows, new Commercial, Mixed Use and Multiple Unit Residential development will be encouraged to cluster in the City Centre. It will be important for this development to contribute to the livability and vibrancy of streets and public spaces.

### 12.1.4 Objectives

The following guidelines are intended to:

- Facilitate a high standard of building design, site compatibility, and attention to site context
- Incorporate climate action strategies into development practices
- Integrate higher density residential and mixed use commercial development into the City Centre
- Provide a mix of building forms, choices, and affordable opportunities in the City Centre
- Integrate residential and cultural land uses with commercial businesses
- Incorporate Crime Prevention Through Environmental Design (CPTED) principles into development within the City Centre, while ensuring that vulnerable people are respected
- Enhance the public realm, provide ample opportunities for residents and visitors to gather and socialize, and create an interesting and vibrant neighbourhood with animated shopping streets


### 12.1.5 Exemptions

The following exemptions to DPA 1 may be applied:

- Interior Renovations not resulting in any change to the exterior appearance of the building
- Parcel consolidation
- Signage copy change if no changes to the dimensions of the existing sign
- Emergency circumstances to remove any immediate danger

- Buildings that have been destroyed by fire and/or natural disaster less than 75%, as determined by the Building Official, provided the building's massing, siting and general appearance are as prior to destruction and the use conforms to the City's Zoning Bylaw No. 2284, as amended from time to time
- Any servicing work undertaken by or on behalf of the City of Merritt



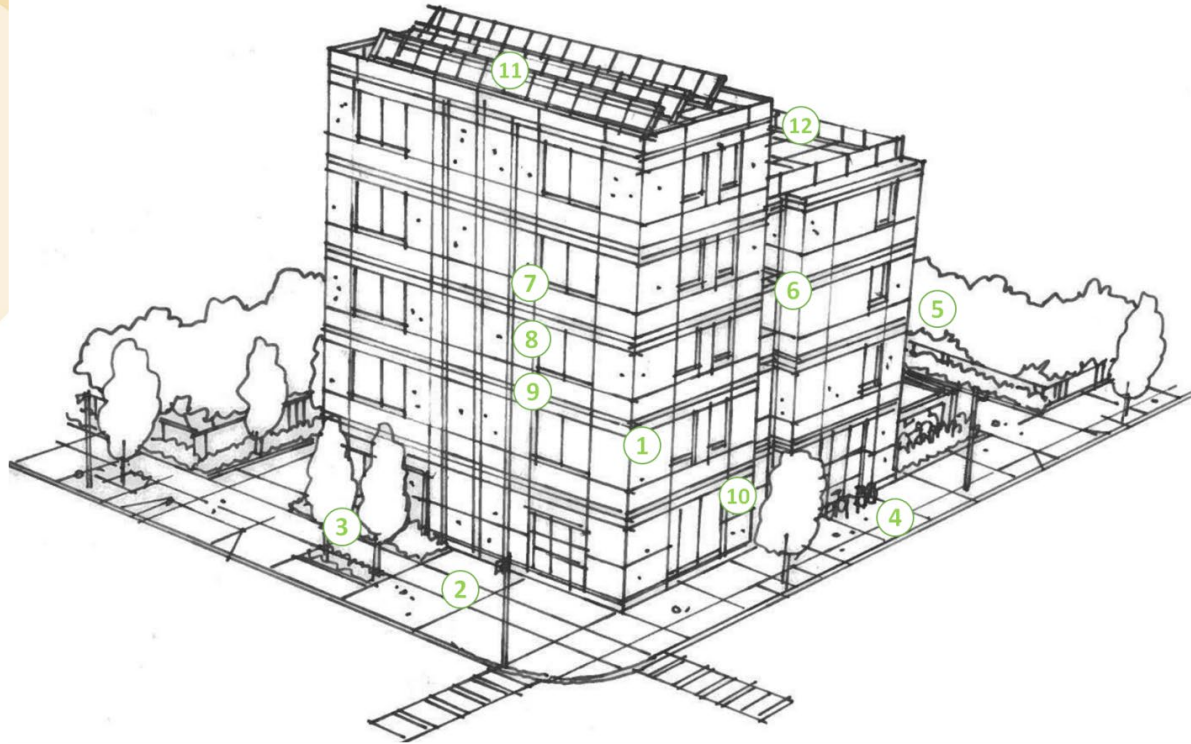

## Key Elements

### 1 – Defined Streetscape

Site buildings so they front and frame public streets. For corner parcels, site buildings to front both streets.

### 2 – Public Realm

Enliven the public realm with attractive amenities such as seating, bike parking, plantings, water bottle filling stations, wayfinding, transit shelters, and public art.

### 3 – Xeriscaping

Use drought tolerant and native plant and tree species.

### 4 – Short-Term Bicycle Parking

Provide bike racks near the building entrance, in a highly visible location.

### 5 – Vehicle Parking Lots

Locate vehicle parking underneath or behind buildings. Visually deemphasize and screen parking lots with landscaping. Break up large surface parking lots into smaller clustered ones with the use of landscaped islands.

### 6 – Architectural Interest

Vary building materials, colours, rooflines, and other architectural elements. Establish a rhythm to the streetscape by integrating vertical elements and breaks in the façade of a building.

### 7 – Simplified Massing

Design buildings with simplified massing, including minimal articulation to minimize building envelope heat loss.

### 8 – FireSmart Materials

Use non-combustible exterior façade and roofing materials to reduce the risks associated with wildfire.

### 9 – Exterior Colours

Use a light colour palette, which may include light earthtone colours. Avoid dark exterior colours to reduce energy use for cooling systems and the heat island effect. Use multiple colours to add interest.

### 10 – Window-to-Wall Ratio

Design buildings to have an overall window-to-wall ratio of 40% to reduce energy costs.

### 11 – Solar Energy

Design buildings to incorporate solar panels, where possible.

### 12 – Stepback

Design midrise buildings with a stepback configuration.

## Guidelines

The following guidelines may be applied when setting Development Permit conditions.

### SITE CONTEXT

To guide the design of development sites within the context of the greater neighbourhood.

#### 12.1.6 Neighbourhood Connectivity

Design the site to enhance the pedestrian, bicycle, and vehicle connections in the area.

#### 12.1.7 Streetwall Continuity

Design building streetwalls to include architectural features and patterns that are aligned with adjacent buildings, where possible.

#### 12.1.8 Shade and Sun Exposure


Position buildings to maximize summer shade and winter sun for nearby private and public open spaces, buildings, and dwelling units. Provide a shade study for buildings over 10 metres in height.

### SITE PLANNING

To guide the design of development sites internally and in relation to interfaces with the public realm.

#### 12.1.9 Fronting Streets

Site buildings to front public streets. For corner parcels, site buildings to front both streets.



#### 12.1.10 Corner Plazas

For corner parcels, corner plazas are encouraged. As a minimum, the plaza should be consistent with the sight triangle area as outlined in Zoning Bylaw No. 2284, as amended from time to time. Corner plazas should include amenities such as benches, bike racks, landscaping, public art, wayfinding, and other street furniture.

#### 12.1.11 Defined Spaces

Define spaces that are private from those that are public with elements such as landscaping, fencing, or grade changes.

#### 12.1.12 Mid-Block Connections

For mid-block parcels, provide a breezeway or pathway through from the street to the rear lane, where possible, to facilitate pedestrian connections.

### 12.1.13 Accessible Site Design

Design outdoor space to address the functional needs of persons with disabilities, including those who are hearing, mobility, or visually impaired. Incorporate braille, acoustic techniques, and other universal design elements into site design. Ensure pathways are paved and slopes are minimized.

### 12.1.14 Walking Connections

Connect main entrances and unit entrances to public sidewalks, parking areas, adjacent residential and commercial sites (existing and future), and trails, with a sufficiently wide pathway.

### 12.1.15 Informational Displays

Install informational displays along pathways, focusing on local history and Indigenous culture, where possible.

### 12.1.16 Designated Cycle Routes

Provide additional bicycle parking in developments located along designated cycle routes, as identified in the Active Transportation Plan's Cycle Network Map.

### 12.1.17 Transit Access

Design buildings on designated transit routes to provide direct access and clear sightlines to bus stops.

### 12.1.18 Private and Public Open Spaces


Integrate usable private and public open spaces into the site, such as courtyards, parks, patios, playgrounds, plazas, or rooftop gardens. Incorporate informational displays or murals, focusing on local history and Indigenous culture, into these spaces. Locate these open spaces adjacent to active uses, such as cafes or retail stores.

### 12.1.19 Street Furniture

Provide benches, bicycle racks, wayfinding, and other street furniture near main entrances.

### 12.1.20 Site Grading

Step buildings along the length of a sloping street.

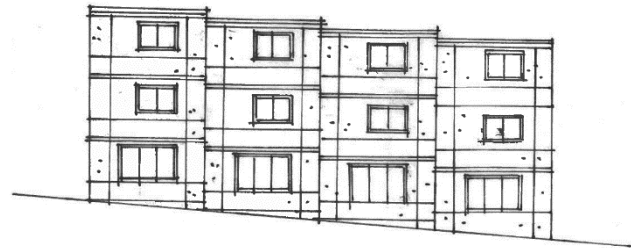

### 12.1.21 Retaining Walls

Avoid the use of retaining walls. Where retaining walls are required, use decorative block, limit their height, terrace them, and landscape them.

### 12.1.22 Drive-Through Facilities

Drive-through facilities are not permitted in the City Centre.

### 12.1.23 Composting, Garbage, Recycling, and Storage

Composting, garbage, recycling, and storage areas should be located behind buildings. Screen these areas with materials that are complementary with principal buildings on the site.

## LANDSCAPE AND STREETScape

To guide the design of landscaping and streetscapes to create aesthetically pleasing, vibrant, safe, and environmentally sound spaces.

### 12.1.24 Public Realm

Enliven the public realm between buildings and street curbs with attractive amenities such as benches, bike parking, plantings, water bottle filling stations, wayfinding, transit shelters, and public art.

### 12.1.25 Pedestrian Areas

Define pedestrian areas with the use of landscaping elements.

### 12.1.26 Screening

Screen areas that are not aesthetically pleasing, such as blank walls, parking lots, and storage areas, with the use of landscaping.

### 12.1.27 Xeriscaping

Landscape with drought tolerant and native plant and tree species.

### 12.1.28 Fire Smart Planting

Use fire resistant plants, where possible. Deciduous trees are preferred. Avoid the use of highly flammable plants and trees, including coniferous trees with cones or needles. Cedars, junipers, spruce, pine other than Ponderosa, tall grasses, and mulch are prohibited.

### 12.1.29 Heat and Wind Mitigation

Strategically plant trees, shrubs, and other vegetation to protect from excessive heat and high winds.

### 12.1.30 Street Trees

Line street frontages with equally spaced, deciduous, drought tolerant, fire resistant trees.

### 12.1.31 Tree Canopies

Use trees with a high enough canopy that pedestrian sightlines are established or maintained.

### 12.1.32 Hedgerows and Hedges

Avoid tall hedgerows along public sidewalks and streets. Hedges are prohibited due to their water consumption and fire risk.



### 12.1.33 Fences

Along public sidewalks and streets, avoid tall fences and use quality fence materials which provide visibility, such as wrought iron. Chainlink fences are prohibited along public streets in the City Centre.

### 12.1.34 Stormwater Infiltration

Consider the use of permeable pavers or pavement for parking lots and other paved surfaces.

### 12.1.35 Crime Prevention Through Environmental Design

Incorporate Crime Prevention Through Environmental Design (CPTED) techniques to ensure spaces are safe, while also considering any potential impacts of the CPTED design elements on vulnerable persons.

## LIGHTING

To guide the design of lighting to protect from light pollution, improve safety, and reduce energy use.

### 12.1.36 Pedestrian Oriented Lighting

Ensure lighting is pedestrian oriented in height and location. Light pathways that provide connections between buildings and other areas of the site and public realm. Lighting of areas not intended for night-time use should be avoided.

### 12.1.37 Lighting in Parking Areas

Ensure that lighting is installed in parking lots and structures, and along pathways that lead from parking areas to buildings.

### 12.1.38 Dark Sky

Avoid light pollution by directing lighting downwards.

### 12.1.39 Uplighting

Use uplighting sparingly, and only for accenting architectural or landscape features or in-ground pathway lighting to improve safety.

### 12.1.40 Lighting Distractions

Direct lighting fixtures away from adjacent residential properties and as not to create a distraction to vehicle drivers or cyclists. Lighting must not display distracting light patterns.

### 12.1.41 Solar Powered Lighting

Use solar powered lighting, where possible.

### 12.1.42 Sensor Activated Lighting

Use sensor activated lighting for security and energy conservation.



## PARKING AND LOADING

To guide the design and location of parking and loading facilities.

### 12.1.43 Long-Term Bicycle Parking

Provide secured long-term bicycle parking, preferably where bicycles can be fastened to a rack. Parking for alternative forms of active transportation, such as mobility scooters, may be substituted for bicycle parking spaces.

### 12.1.44 Short-Term Bicycle Parking

Provide bike racks near the building or unit main entrance(s).

### 12.1.45 Vehicle Parking Lots

Locate vehicle parking underneath or behind buildings. Screen parking lots with landscaping. Use landscaped islands to break up large surface parking lots into smaller clustered ones.



### 12.1.46 Underground Parking

Ensure the height of underground parking structures do not exceed grade level, where possible. If the underground parking is partially above grade, screen with landscaping or use aesthetically pleasing materials on the exposed structure.

### 12.1.47 Parking Structures

Locate parking structures behind buildings, where possible. If parking structures are abutting public streets, ensure streetwall continuity by using design elements and materials that are compatible with adjacent buildings. Screen blank walls with landscaping and public art. Ensure pedestrian entrances and stairwells are prominent and highly visible from sidewalks. Use wayfinding signage to guide users throughout the parking structure.

### 12.1.48 Shared Access and Parking

Use shared vehicle access points and shared vehicle parking facilities to reduce the number of curb cuts. Provide access from lanes, where possible.

### 12.1.49 Loading Areas

Design loading areas to be accessible to service vehicles without interfering with pedestrian circulation.

### 12.1.50 Zero Emission Vehicles

Include zero emission charging, such as electric vehicle charging stations, on site.

## BUILDING DESIGN

To guide the design of buildings that are people focused, attractive and functional with the streets on which they front.

### 12.1.51 Building Entrances


Main entrances should be located adjacent to the street where the building is facing and easily identifiable.

### 12.1.52 Corner Buildings

Design corner buildings to front both streets with main entrances at the corner. Ensure massing of the building at the corner is architecturally prominent.

### 12.1.53 Transparent Fronts

Use transparent glazing for building foyers and ground level storefronts.

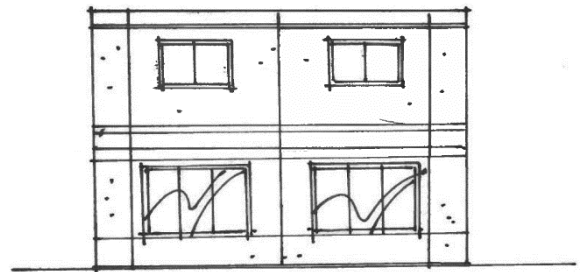

### 12.1.54 Height Expression

Buildings in the City Centre should be designed to be the equivalent of three storeys minimum, either in terms of actual storeys or height in metres.

### 12.1.55 Architectural Interest

Vary building materials, colours, and other architectural elements, while being mindful of energy efficiency. Avoid blank walls and large expanses of singular materials.

### 12.1.56 Simplified Massing

Design buildings with simplified massing, including minimal articulation and limited complex junctions, to minimize building envelope heat loss.

### 12.1.57 Incorporating Architectural Elements

Design buildings to include architectural elements that reflect materials or design features from nearby architecturally significant buildings, where possible.

### 12.1.58 Fire Smart Materials

Use non-combustible exterior façade and roofing materials to reduce the risks associated with wildfire. Brick, fibre cement board, or stucco is preferred. Poured concrete is acceptable. Metal products are recommended for vents and flashing. Vinyl is prohibited.

### 12.1.59 Exterior Colours

Use a light colour palette, which may include light earthtone colours. Avoid dark exterior colours to reduce energy use for cooling systems and minimize the heat island effect. Use multiple colours to add interest. Bright colours are acceptable as accents, such as trim or entrance areas.

### 12.1.60 Murals

Exterior murals are encouraged. The use of materials to create portable or removable murals is preferred.

### 12.1.61 Window-to-Wall Ratio

Design buildings to have an overall window-to-wall ratio of 40%. Ground floor commercial frontages should have a higher ratio while accommodating the 40% ratio in the building overall.

### 12.1.62 Roofing

Pitched or flat roofs are acceptable. Avoid steep pitches to reduce surface area. Shingles must be a lighter tone and not black. The surfaces of flat roofs must be painted or finished with a light colour to minimize the heat island effect.

### 12.1.63 Rooftop Equipment

Screen or enclose rooftop mechanical equipment.

### 12.1.64 Green Roofs and Walls

Design buildings to incorporate green roofs and green walls, where possible.



### 12.1.65 Solar Energy

Design buildings to incorporate solar panels, where possible.

### 12.1.66 Historical Significance

Ensure that the facades of buildings of historical significance are preserved.

### 12.1.67 Scale Transition

Use height transitions when adjacent to lower density residential buildings, where possible.

### 12.1.68 Accessible Buildings

Design buildings to address the functional needs of persons with disabilities including those who are hearing, mobility, and visually impaired.

## 12.1.69 Signage

Design signage to be consistent with the associated building and integrate it into the building façade. Under Canopy Signs (blade signs) that extend from buildings over sidewalks are encouraged. Backlit box signs and single or double pole mounted signs are not permitted, except for poles for City of Merritt banners. Incorporate local Indigenous languages (Nłeʔkepmxcin and Nsyilxcən) into signage, if possible. Signs shall conform with Sign Regulation Bylaw No. 1900, as amended from time to time.

## MIDRISE BUILDINGS

To guide the specific design requirements for attractive midrise (5 to 12 storey) development.

### 12.1.70 Midrise Stepback

Design midrise buildings with a stepback configuration. Determine the height of the podium by reflecting adjacent buildings, where possible, to create a continual streetwall.

### 12.1.71 Rooftop Design and Access


Landscape midrise rooftops and make them accessible to tenants/residents as usable private/public outdoor space, such as gardens or café patios.

## COMMERCIAL BUILDINGS

To guide the specific design requirements for attractive commercial development.

### 12.1.72 Active Ground Floors

Design commercial buildings to include narrow storefronts. Larger retail or office spaces should be located to the rear or above the ground floor.

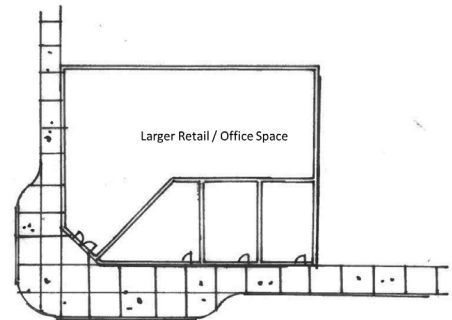

## MIXED USE BUILDINGS

To guide the specific design requirements for attractive mixed use development.

### 12.1.73 Ground Floor Commercial

Mixed use buildings must include commercial space on the ground floor. Additional commercial space on floors above the ground floor, including restaurants with access to the rooftop, is encouraged.

### 12.1.74 Locating Residential

Locate residential dwellings in mixed use buildings above or below the ground floor, or behind the ground floor commercial space.

### 12.1.75 Separated Uses

Separate entrances for upper storey residential uses from the entrances to ground floor commercial uses.



### MULTIPLE UNIT RESIDENTIAL BUILDINGS

To guide the specific design requirements for attractive multiple unit residential development.

#### 12.1.76 Triplexes and Fourplexes

Design triplex and fourplex buildings to locate units side by side, up and down, or back to back. For parcels with lane access, take advantage of the lane by facing some units to the lane and/or locating parking access off the lane.

#### 12.1.77 Rowhouses and Stacked Townhomes

Design rowhouse and stacked townhome buildings to front the street. For parcels with lane access, take advantage of the lane by facing some units to the lane and/or locating parking access off the lane.

#### 12.1.78 Apartment Buildings

Design apartment buildings to front the street. Locate parking access off the lane, where possible. If townhome units are included in the development, locate them on the ground floor with patio space and landscaping to define the private space from the public realm.

### DISTRICTS

To guide the design of development within specific districts of the City Centre.

#### Quilchena District

##### 12.1.79 Commercial or Mixed Use

Developments on parcels fronting Quilchena Avenue must be commercial or mixed use. Multiple Unit Residential and Institutional are not permitted.

##### 12.1.80 Podium and Stepback

Design buildings on parcels fronting Quilchena Avenue to have a two storey podium and stepback to maintain a village feel on the City's main street.

##### 12.1.81 Façade


Ensure that facades of buildings facing Quilchena Avenue utilize high quality materials. Incorporate blade signs into the design for retail and office spaces.

##### 12.1.82 Patios and Courtyards

Design developments on parcels fronting Quilchena Avenue to include sidewalk abutting patios or courtyards to activate the street.

### 12.1.83 Pass Through

Design developments on parcels fronting the north side of the 2000 Block of Quilchena Avenue to incorporate public pathways or breezeways from Quilchena Avenue to the rear lane, where possible, to provide pedestrian access to Spirit Square.

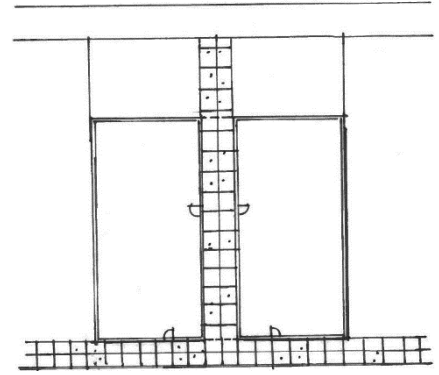

## Granite District

### 12.1.84 Maximize Sun Exposure

Design buildings on parcels fronting the south side of Nicola Avenue with a stepback to maximize sun exposure on Nicola Avenue.

### 12.1.85 Telecommunications

Restrict the height of buildings on parcels adjacent to the telecommunications tower at 2052 Granite Avenue to four storeys.

## Civic District

### 12.1.86 Plazas and Patios

Design developments on parcels fronting Voght Street or Mamette Avenue to incorporate plazas or patios that abut the sidewalk, to increase activation of the street.


### 12.1.87 Corner Development

Developments on corner parcels at Nicola Avenue and Voght Street should be mixed use and reflect the importance of their location by including grand corner building accesses, architectural interest, and patio space abutting the sidewalk.

## Kengard District

### 12.1.88 Minimize Shadowing

Developments on parcels fronting the north side of Nicola Avenue should utilize a stepback design at the rear of the buildings or locate surface parking to the rear, as to minimize shadowing impacts on properties to the north of the rear lane.

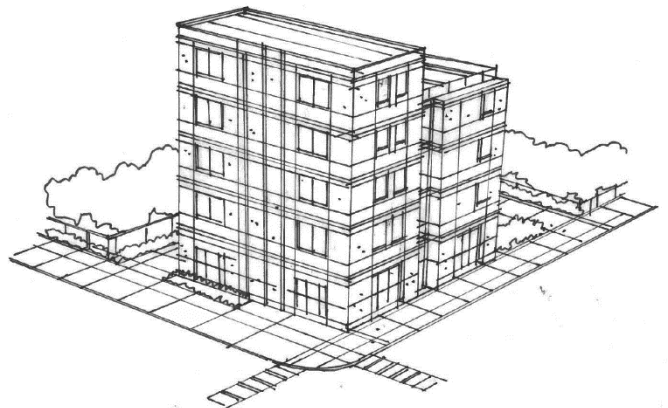

### 12.1.89 Sidewalk Patios

Design developments on parcels fronting Voght Street or Nicola Avenue to incorporate patios that abut the sidewalk, to increase activation of the street.

## Aspen District

### 12.1.90 Minimize Front Setback

Position buildings on parcels fronting Quilchena Avenue to abut the sidewalk, and buildings on parcels fronting the south side of Nicola Avenue to have the minimum setback as per the Ministry of Transportation and Infrastructure.


### 12.1.91 Patios, Courtyards, and Plazas

Developments in the Aspen District should include patios, courtyards, or plazas.

## Railyard District

### 12.1.92 Building Access

Position buildings to front the street, with entrances from the street front. Locate surface parking to the rear and/or internally within developments. Utilize breezeways or pathways to provide access from rear parking lots to main entrances.

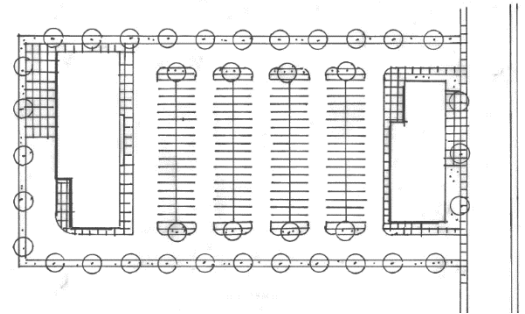

### 12.1.93 Residential in Mixed Use Buildings

Design mixed use commercial buildings to include multiple stories of residential above the ground floor. Locate townhomes at the rear of buildings, fronting lanes or internal driveways, where possible.

## River District

### 12.1.94 Ground Floor Townhomes

Design apartment buildings to include townhomes on the ground floor.

### 12.1.95 Riverfront Access

Developments adjacent to the Coldwater River should include riverside patio space and public pathways for access to and along the river.

## Nicola District

### 12.1.96 Minimize Rear Shadowing

Developments on parcels fronting the north side of Nicola Avenue should utilize a stepback design at the rear of the buildings or locate surface parking to the rear, as to minimize shadowing impacts on properties to the north of the rear lane.

### 12.1.97 Sidewalk Abutting Patios

Design developments on parcels fronting Voght Street or Nicola Avenue to incorporate patios that abut the sidewalk, to increase activation of the street.